



产品细节 Details



Victor 维克多

737 吸顶灯

Ceiling surface mounted luminaires technical data sheet

维克多737吸顶灯，采用创新的整体铝合金结构。外观尺寸比例科学，灯具线条流畅美观。反射飞翼采用Nanoflex®纳米喷涂技术，以实现灯具最高效率，二次反射型灯具，出光柔和无阴影，扩散角度广，先进的热管理技术，散热效果优异，确保了灯具最大光输出的持续性及色温的一致性。

应用场所：写字楼、学校、医院、高档超市、酒店、商场、公共建筑等。



737 series ceiling mounted with an innovative aluminum extrusion structure design with two wings in Nanoflex powder coating technology to achieve the maximum output efficiency and makes soft and shadow free light output via secondary reflection and wider beam angle. Advance thermal management technology to ensure consistency of LED life span, color temperature and maximize output lumens. Applications: Offices, schools, hospitals, hotels, shopping malls, public buildings etc.

规格参数 Technical Data

名称：737 吸顶灯	Product name: 737 Ceiling surface mounted luminaire
类型：吸顶灯	Type: Ceiling surface mounted luminaires
灯体材料：优质铝合金	Housing material: High-quality Aluminum alloy
表面处理：纳米喷涂	Surface finish: Nanoflex
控光面罩：PMMA	Diffuser material: PMMA
光源：SMD	Light source: SMD
整灯光效：95 lm/W	Luminaire efficiency: 95 lm /W
显色指数：≥83	CRI: ≥83
色温：3000K/ 4000K/6500K	Color temperature: 3000K / 4000K / 6500K
输入电压：220-240V	Input voltage: 220-240V
驱动电源：高转换率驱动电源	Driver: High efficiency driver
灯具寿命：3万小时	Lifespan: 30000h
电气等级：I	Electrical grade: I

 Indoor 室内适用	 General lighting 基础照明	 High efficiency 高光效	 Long life 长寿命	 Anti glare 防眩光	 Accurate light distribution 准配光
 No flickering 无频闪	 IP 20 Protection level 防护等级	 Protective grounding 保护接地	 Fire protection 防火	 Low lumen depreciation 低光衰	 color-temp changing 调色温驱动电源
 Microwave sensor 微波感应控制	 Emergency kits 应急照明组件	 DALI	 light control 光控	 Wifi or Ble, Zigbee	 1-10V 1-10V dimming 1-10V调光
 China Compulsory Certification 3C认证	 CE certification CE认证	 CB certification CB认证			


标准灯具 Standard single fitting

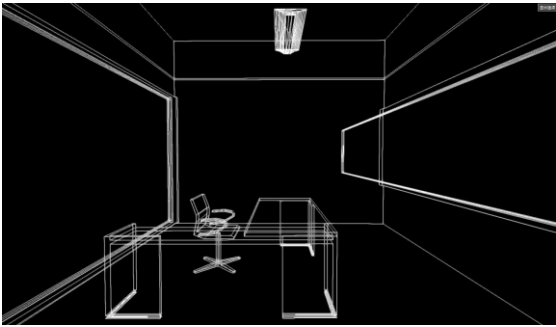

小功率 (HO-L)

CCT: 3000K
Colors: White



Item No	Power Flux	L*W*H
737-CM1140T36W	36W / 3420 lm	1140*220*93



小功率 (HO-L)

CCT: 4000K
Colors: White


Item No	Power Flux	L*W*H
737-CM1140T36W	36W / 3440 lm	1140*220*93



小功率 (HO-L)

CCT: 6500K
Colors: White


Item No	Power Flux	L*W*H
737-CM1140T36W	36W / 3460 lm	1140*220*93



应用参考 Application reference

Open space: 10m x 10m x 3m; reflectance (%): ceiling80/wall50/floor20/ floor ceiling walls; illuminance is the average lux level on 0.75m working surface; "H" is the fittings installation height

开放式空间：10m x 10m x 3m; 反射率(%): 天花板 80/墙壁50/地板20; 照度为 0.75m工作面平均照度; H为灯具安装离地高度。




Item No	Power Flux	Number	W/m ²	H=2.8m Illuminance(Lux)
737-CM1140T36W	36W / 3420 lm	16	5.76	348

关联产品 Related products



P137



P145



P145