


NIMBLE-L SUSPENDED LUMINAIRE 735B

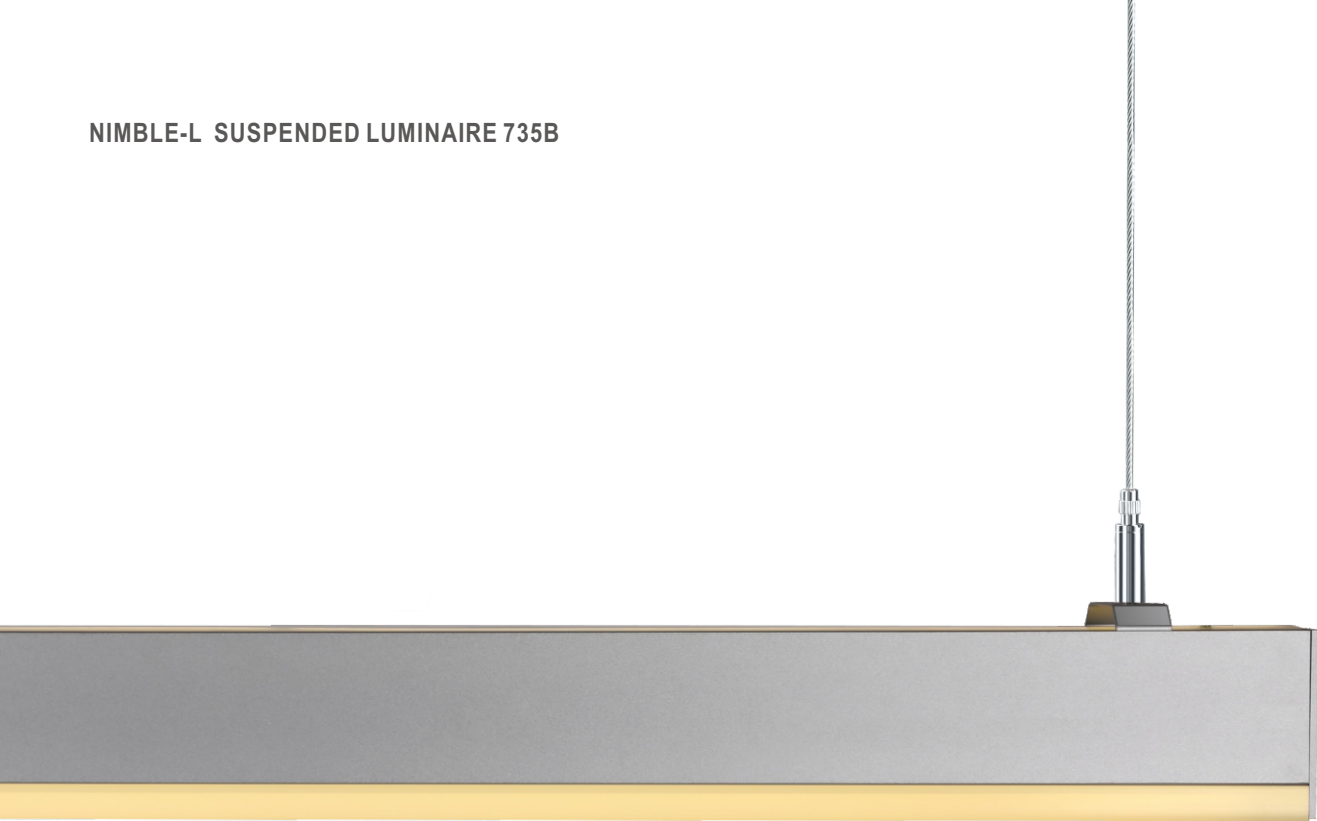

Nimble -L 尼博

735B 吊灯
Suspended luminaires technical data sheet


735B 尼博线形吊灯为简约式LED灯具，采用优质铝合金型材灯体,无螺丝压铸铝端盖，灯具线条硬朗美观、外观尺寸比例科学，结构合理，安装维护方便灵活。“U”型PMMA面罩结合了耐贝西创新的直接照明+间接照明的照明理念，运用防眩光灯罩，高透光率扩散型PMMA散光罩根据LED光波长开发，出光均匀无阴影、防眩光效果好，控光面罩与灯体完美结合使整个灯具更加美观。先进的热管理技术，散热优异，确保了灯具最大光输出的持续性及色温的一致性。

应用场所：写字楼、学校、医院、高档超市、酒店、商场、公共建筑等。

735B Nimble series Suspend mounted linear LED Luminaire, housing made of high pressure extruded aluminum construction, die-cast aluminum end caps with no visible screws, simple and easy installation, excellent heat dissipation. Available with fixed direct distributions and the indirect/direct distributions options, applying anti-glare diffuser and double transmission principle of secondary reflection, Slim Compact series with Germany imported high transmittance U-shape PMMA diffuser specially designed for LED light source creating smooth and uniform lighting distributions, without visible dark spot or light gaps in seamless continuous lighting system. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximize output lumens.

Applications: Offices, Educational Institutes, Hospitals, Warehouses, Hospitality, Retails Etc.

产品细节 Details

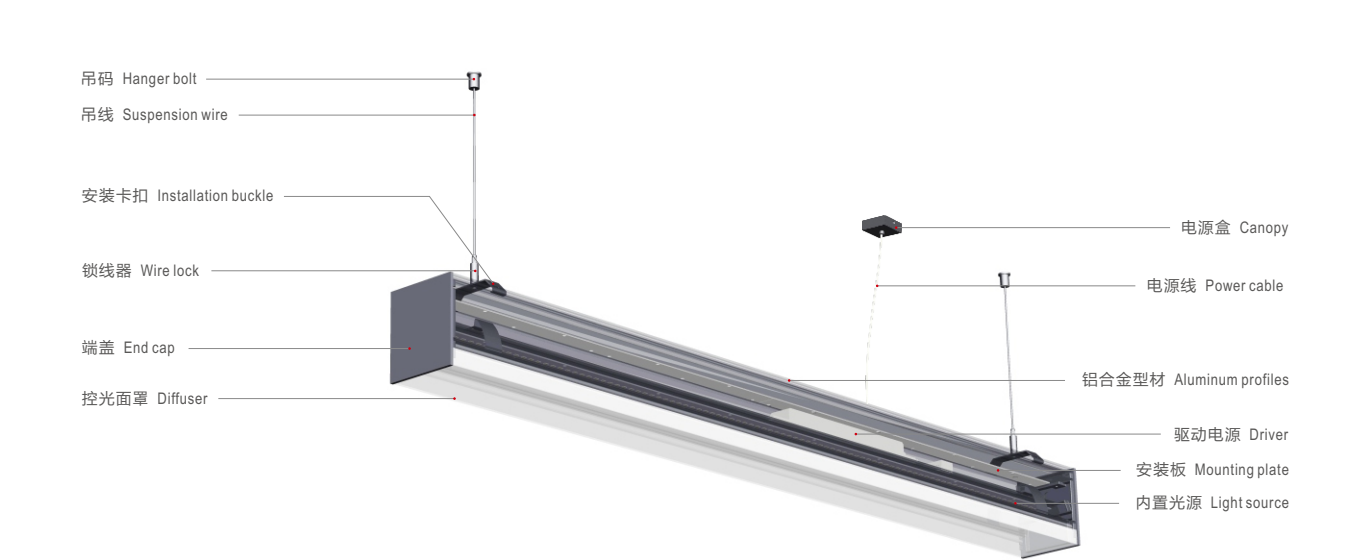


规格参数 Technical Data


名称：735B 吊灯	Product name: 735B Suspended luminaire
类型：吊灯	Type: Suspended
灯体材料：优质铝合金	Housing material: High-quality Aluminum alloy
表面处理：静电喷涂	Surface finish: Electrostatic thermo-painting
控光面罩：PMMA	Diffuser material: PMMA
光源：SMD	Light source: SMD
整灯光效：105 lm/W	Luminaire efficiency: 105 lm /W
显色指数：≥83	CRI: ≥83
色温：3000K/ 4000K/6500K	Color temperature: 3000K / 4000K / 6500K
输入电压：220-240V	Input voltage: 220-240V
驱动电源：高转换率驱动电源	Driver: High efficiency driver
灯具寿命：3万小时	Lifespan: 30000h
电气等级：I	Electrical grade: I

 Indoor 室内适用	 General lighting 基础照明	 High efficiency 高光效	 Long life 长寿命	 Anti glare 防眩光	 Accurate light distribution 准配光
 No flickering 无频闪	 IP 20 Protection level 防护等级	 Protective grounding 保护接地	 Fire protection 防火	 Low lumen depreciation 低光衰	 color-temp changing 调色温驱动电源
 Microwave sensor 微波感应控制	 Emergency kits 应急照明组件	 DALI	 light control 光控	 Wifi or Ble, Zigbee	 1-10V 1-10V dimming 1-10V调光
 China Compulsory Certification 3C认证	 CE certification CE认证	 CB certification CB认证			


标准灯具 Standard single fitting



低功率 (HE)
CCT: 3000K
Colors: Silver / White / Black





低功率 (HE)
CCT: 4000K
Colors: Silver / White / Black



Item No	Power Flux	L*W*H
735B-SS1143T18W	18W / 1890 lm	1143*94/105
735B-SS1703T27W	27W / 2835 lm	1703*94/105
735B-SS2263T36W	36W / 3780 lm	2263*94/105

Item No	Power Flux	L*W*H
735B-SS1143T18W	18W / 1910 lm	1143*94/105
735B-SS1703T27W	27W / 2855 lm	1703*94/105
735B-SS2263T36W	36W / 3800 lm	2263*94/105




低功率 (HE)
CCT: 6500K
Colors: Silver / White / Black

Item No	Power Flux	L*W*H
735B-SS1143T18W	18W / 1930 lm	1143*94/105
735B-SS1703T27W	27W / 2875 lm	1703*94/105
735B-SS2263T36W	36W / 3820 lm	2263*94/105

关联产品 Related products








P283



P289





P299





小功率 (HO-L)
CCT: 3000K
Colors: Silver / White / Black

Item No	Power Flux	L*W*H
735B-SS1143T36W	36W / 3780 lm	1143*94*105
735B-SS1703T54W	54W / 5670 lm	1703*94*105
735B-SS2263T72W	72W / 7560 lm	2263*94*105







小功率 (HO-L)
CCT: 4000K
Colors: Silver / White / Black

Item No	Power Flux	L*W*H
735B-SS1143T36W	36W / 3800 lm	1143*94*105
735B-SS1703T54W	54W / 5690 lm	1703*94*105
735B-SS2263T72W	72W / 7580 lm	2263*94*105





小功率 (HO-L)
CCT: 6500K
Colors: Silver / White / Black

Item No	Power Flux	L*W*H
735B-SS1143T36W	36W / 3820 lm	1143*94*105
735B-SS1703T54W	54W / 5710 lm	1703*94*105
735B-SS2263T72W	72W / 7600 lm	2263*94*105





低功率 (HE)
CCT: 3000K
Colors: Silver / White / Black

Item No	Power Flux	L*W*H
729BU-SS1143T36W	36W / 3780 lm	1143*94*105
729BU-SS1703T54W	54W / 5670 lm	1703*94*105
729BU-SS2263T72W	72W / 7560 lm	2263*94*105



低功率 (HE)
CCT: 4000K
Colors: Silver / White / Black


Item No	Power Flux	L*W*H
729BU-SS1143T36W	36W / 3800 lm	1143*94*105
729BU-SS1703T54W	54W / 5690 lm	1703*94*105
729BU-SS2263T72W	72W / 7580 lm	2263*94*105



低功率 (HE)
CCT: 6500K
Colors: Silver / White / Black

Item No	Power Flux	L*W*H
729BU-SS1143T36W	36W / 3820 lm	1143*94*105
729BU-SS1703T54W	54W / 5710 lm	1703*94*105
729BU-SS2263T72W	72W / 7600 lm	2263*94*105


标准灯具 Standard single fitting

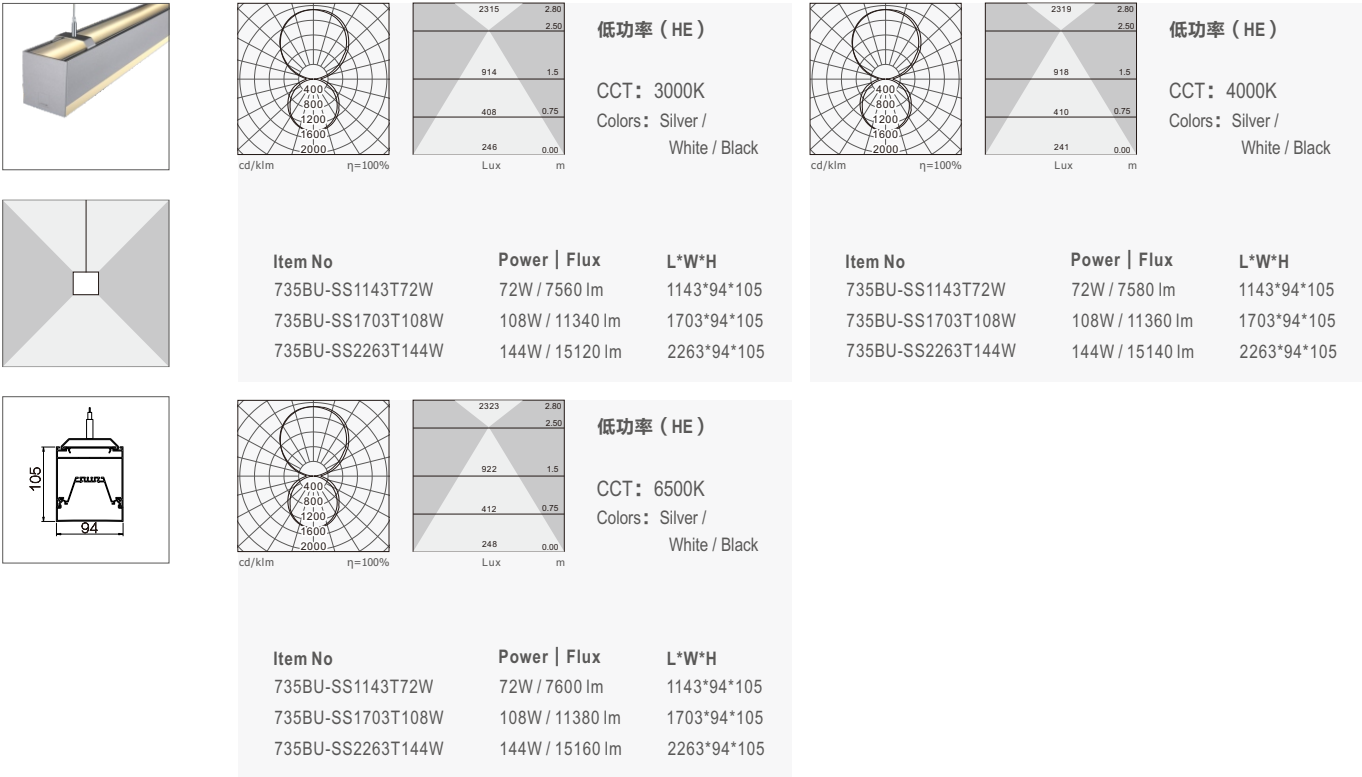

应用参考 Application reference

Open space: 10m x 10m x 3m; reflectance (%): ceiling80/wall50/floor20/ floor ceiling walls; illuminance is the average lux level on 0.75m working surface; "H" is the fittings installation height

开放式空间：10m x 10m x 3m；反射率(%)：天花板 80/墙壁50/地板20；照度为 0.75m工作面平均照度；H为灯具安装离地高度。

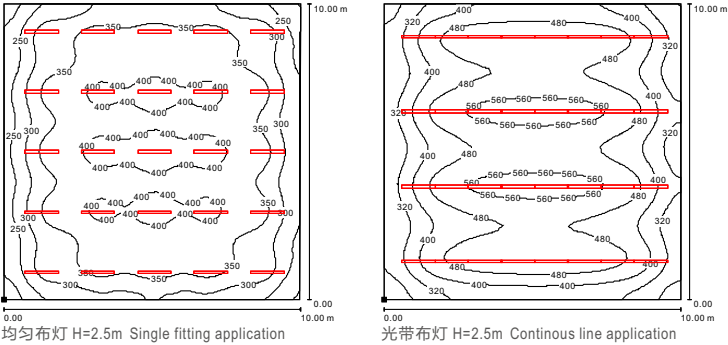

Item No	Power Flux	Number	W/m ²	H=2.8m Illuminance(Lux)
735B-SS1143T18W	18W / 1890 lm	30	5.4	338
735B-SS9600T144W	144W / 15120 lm	4	5.76	446

→
Nimble-L
尼博系列
735B吊灯
办公场所实景图

